


10-METER SSB/CW MOBILE TRANSCEIVER

Please read before operating this transceiver

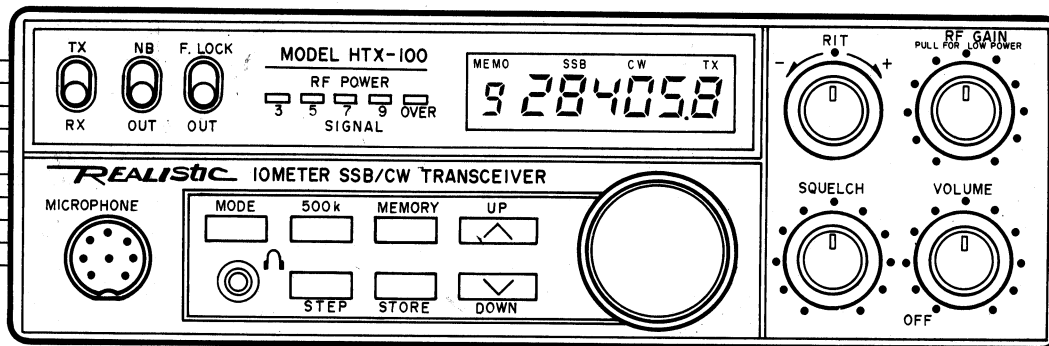



Cat. No. 19-1101

REALISTIC[®]

Downloaded from www.cbradio.nl

SCHEMATIC DIAGRAM

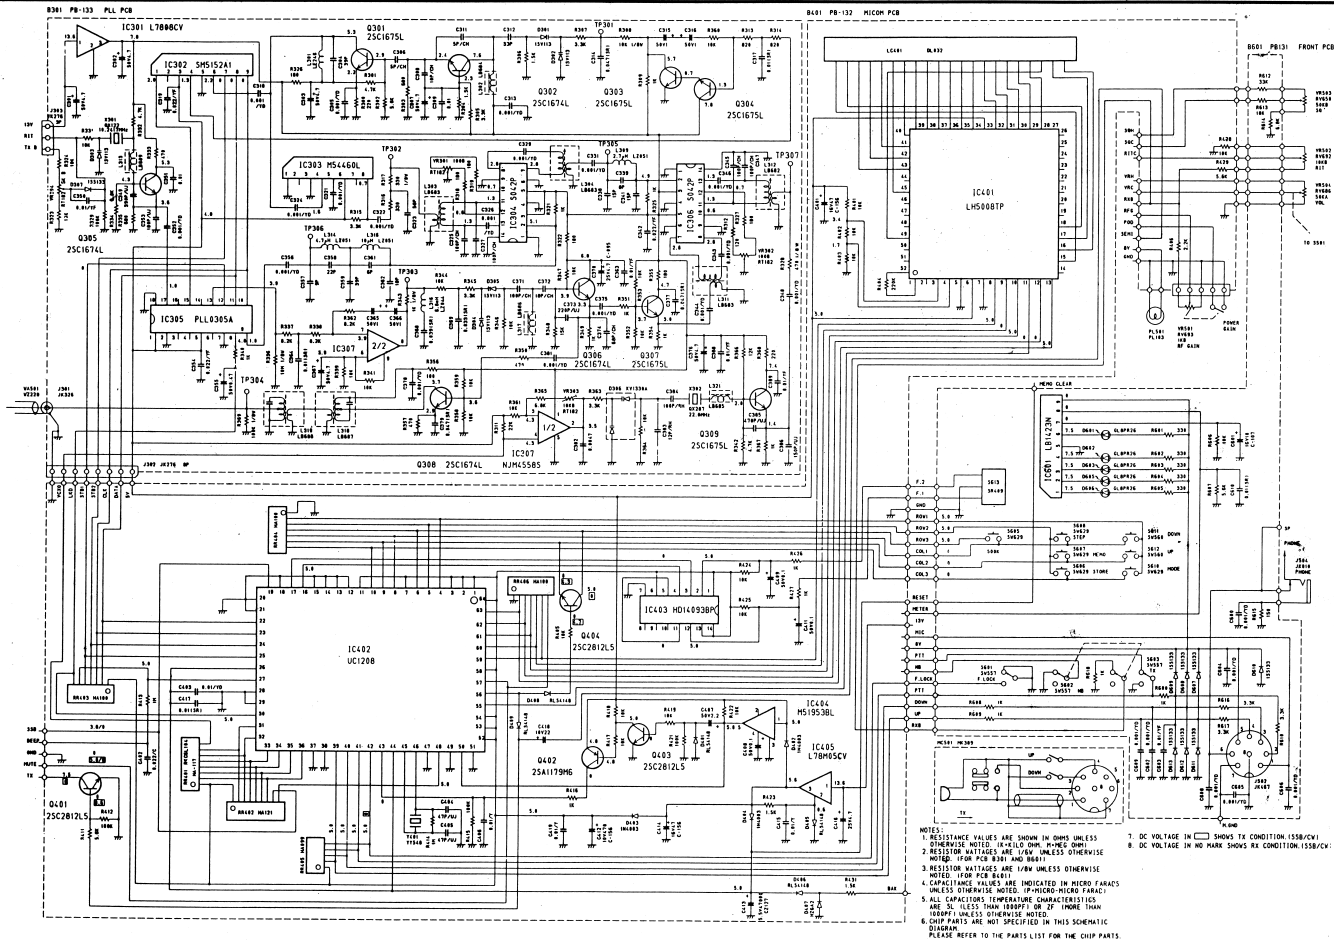

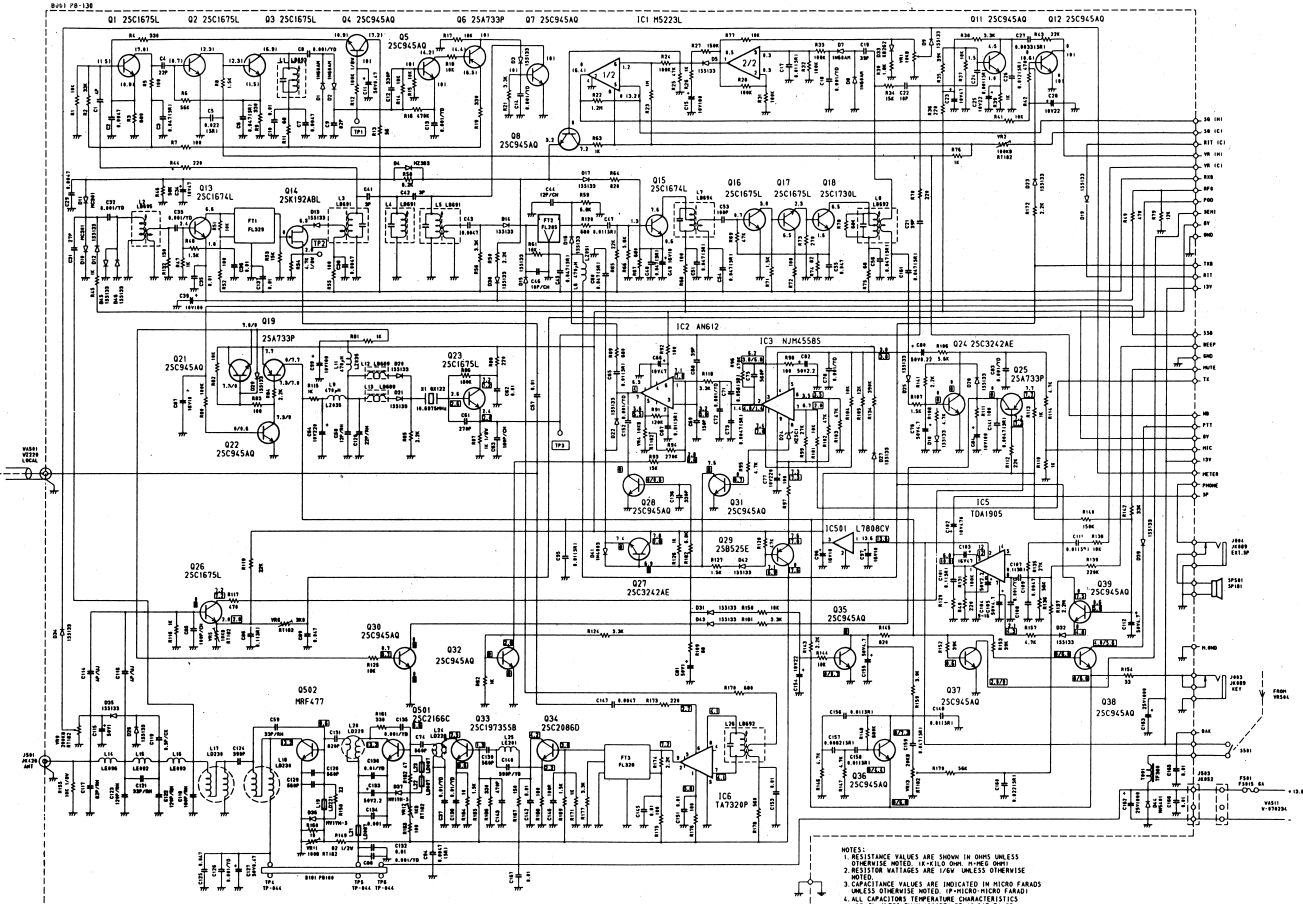

NOTES:
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. IN FIELD OHMS IN OHMS OWN.
 2. RESISTOR RATINGS ARE IN OHMS UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. IF MICRO-HERTZ (MHZ) OR HZ IS LESS THAN INDICATED IN PARENTHESES () ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 50% LESS THAN INDICATED IN PARENTHESES () OR 10% IF RATED 8-25°C UNLESS OTHERWISE NOTED.
 4. DC VOLTAGE INDICATED IN PARENTHESES () IS DC VOLTAGE IN NO LOAD SHOWS IN CONDITION (150%/CV) DC VOLTAGE IN () SHOWS IN CONDITION UNDER OPERATION OF EACH FUNCTION.