PRESIDENT

30 1978 - 2008

Happy Birthday Mister PRESIDENT...

new

5 years warranty

ASC Automatic Squelch Control

JFK II ... times better !

Downloaded from www.cbradio.nl

Groupe PRESIDENT ELECTRONICS
S.A. Capital 5.000.000 €
Siège Social / Head Office – France – Route de Sète – BP 100
34540 BALARUC
Site Internet : http://www.president-electronics.com
e-mail : groupe@president-electronics.com

0918/08-08 C0157

N°1 CB PRESIDENT

100% RoHS EU NORM

JFK II ASC

Functions

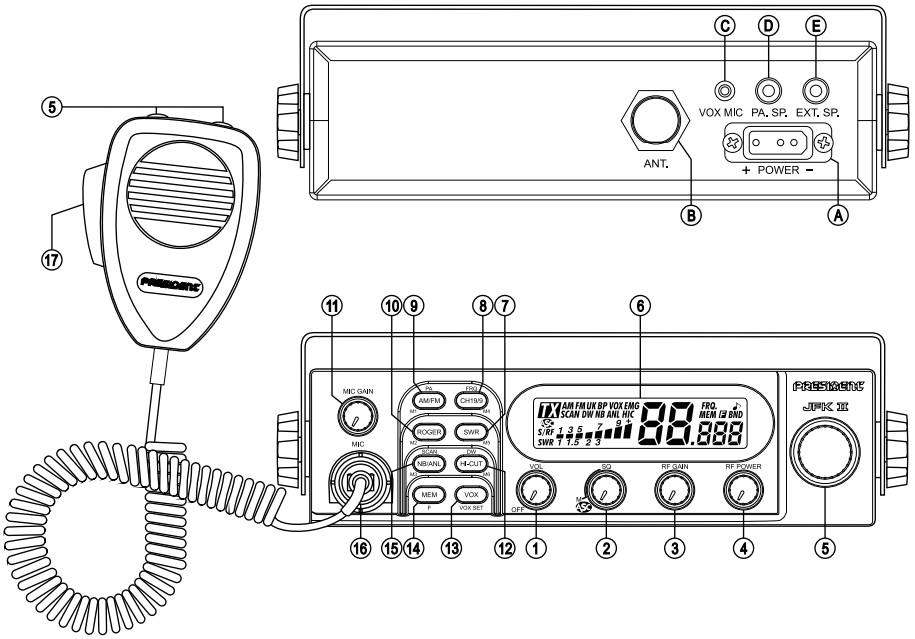

- ✓ Roger Beep
- ✓ Scan
- ✓ Dual Watch
- ✓ 6 memories
- ✓ Vox built-in
- ✓ All european standards
- ✓ Frequencies
- ✓ ...

1) ON/OFF – VOLUME
2) ASC (Automatic Squelch Control) / SQUELCH
3) RF GAIN
4) RF POWER
5) CHANNEL SELECTOR: rotary knob and UP/DN keys of the microphone
6) DISPLAY
7) SWR ~ M5
8) CH 19/9 ~ FRQ ~ M4
9) MODE SELECTOR AM/FM ~ PA ~ M1
10) ROGER ~ M2
11) MIC GAIN
12) HI-CUT ~ DW ~ M6
13) VOX ~ VOX SET
14) MEM ~ F
15) NB/ANL ~ SCAN ~ M3
16) 6 PIN MICROPHONE PLUG
17) PTT

A) POWER SUPPLY (13.2V)
B) ANTENNA CONNECTOR (SO-239)
C) JACK FOR OPTIONAL VOX MIKE (2.2 KΩ Electret, Ø 2.5 mm)
D) JACK FOR LOUDSPEAKER PUBLIC ADDRESS (8 Ω, Ø 3.5 mm)
E) JACK FOR EXTERNAL LOUDSPEAKER (8 Ω, Ø 3.5 mm)

0919/08-08 C0157b

Specifications

1) GENERAL:
- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (in mm) : 180 (W) x 188 (D) x 51 (H)
- Weight : 1.5 kg
- Accessories supplied : microphone UP/DOWN with support, mounting cradle, screws and fused power cord.

2) TRANSMISSION:
- Frequency allowance : +/- 300 Hz
- Carrier power : 1 W AM / 4 W FM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz in AM/FM
- Emitted power in the adjacent channel : inferior to 20 μW
- Microphone sensitivity : 3.0 mV
- Drain : 3 A (with modulation)
- Modulated signal distortion : 2 %

3) RECEPTION:
- Maxi. sensitivity at 20 dB sinad : 0.7 μV - 110 dBm (AM/FM)
- Frequency response : 300 Hz to 3 kHz in AM/FM
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : minimum 0.2 μV - 120 dBm maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rej. rate : 70 dB
- Drain : 0.4 A nominal / 1.5 A max.

all european standards