PRESIDENT

ALL EUROPEAN STANDARDS

new

3 years warranty

WALKER ASC

- microphone up and down
- mike jack on front panel
- ...

We have the JOHNNY and the WALKER.... but still not the whisky!!!!*

** The excessive use of CB radio is not dangerous for your health*

Downloaded from www.cbradio.nl

Groupe PRESIDENT ELECTRONICS

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC
Site Internet : http://www.president-electronics.com – e-mail : groupe@president-electronics.com

N°1 CB PRESIDENT

0733/10-02 C0103

WALKER

Functions

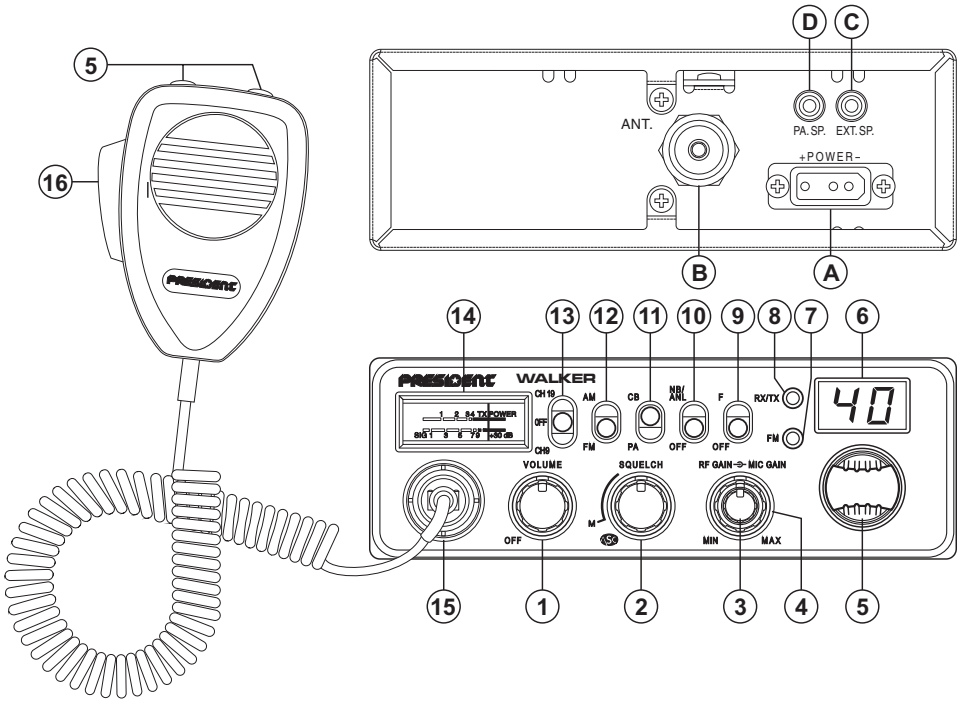

A) DC-POWER TERMINAL (13.2 V)
B) ANTENNA CONNECTOR (SO-239)
C) EXTERNAL SPEAKER JACK (8 Ω, Ø 3.5 mm)
D) PA SPEAKER JACK (8 Ω, Ø 3.5 mm)

1) ON/OFF - VOLUME
2) ASC (Automatic Squelch Control) / SQUELCH
3) RF GAIN
4) MIC GAIN
5) CHANNEL SELECTOR
6) DISPLAY
7) FM LED
8) RX/TX LED
9) FREQUENCY BAND SELECTION
10) NB/ANL
11) CB/PA (Public Address)
12) MODE
13) CH 19 / CH 9
14) BARGRAPH
15) 6-PIN MICROPHONE PLUG
16) PTT (push to talk)

Specifications

WALKER

40 channels
AM / FM
ASC

N°1 CB PRESIDENT

1) GENERAL:

- Channels	:	40
- Modulation modes	:	AM/FM
- Frequency ranges	:	from 26.965 MHz to 27.405 MHz
- Antenna impedance	:	50 ohms
- Power supply	:	13.2 V
- Dimensions (in mm)	:	160 (L) x 160 (H) x 55 (D)
- Weight	:	1.1 kg
- Accessories supplied	:	microphone UP/DOWN with support, mounting cradle, screws and fused power cord.

2) TRANSMISSION:

- Frequency allowance	:	+/- 300 Hz
- Carrier power	:	1 watts AM / 4 W FM
- Transmission interference	:	inferior to 4 nW (- 54 dBm)
- Audio response	:	300 Hz to 3 KHz in AM/FM
- Emitted power in the adj. channel	:	inferior to 20 µW
- Microphone sensitivity	:	3.0 mV
- Drain	:	2 A (with modulation)
- Modulated signal distortion	:	1.8 %

3) RECEPTION:

- Maxi. sensitivity at 20 dB sinad	:	0.5 µV - 113 dBm (AM/FM)
- Frequency response	:	300 Hz to 3 kHz in AM/FM
- Adjacent channel selectivity	:	60 dB
- Maximum audio power	:	5 W
- Squelch sensitivity	:	minimum 0.2 µV - 120 dBm maximum 1 mV - 47 dBm
- Frequency image rejection rate	:	60 dB
- Intermediate frequency rej. rate	:	70 dB
- Drain	:	400 mA nominal / 1500 mA maximum

0734/10-05 C0103b