PRESIDENT

LIBERTY-MIC

WIRELESS MICROPHONE

2 years warranty

Compatible with all PRESIDENT CB radios having a 6 pin microphone

Supplied with

- Audio cord
- Ni-MH battery
- DC Charger (cigar-lighter plug with mini USB connexion)
- Belt Clip

details may differ

Groupe PRESIDENT ELECTRONICS

1341/03-13 - C0293

S.A. Capital 10.000.000 €

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC

Site : http://www.president-electronics.com – Email : groupe@president-electronics.com

N°1 CB PRESIDENT

100% RoHS EU norm

Downloaded from www.cbradio.nl

LIBERTY-MIC

Functions

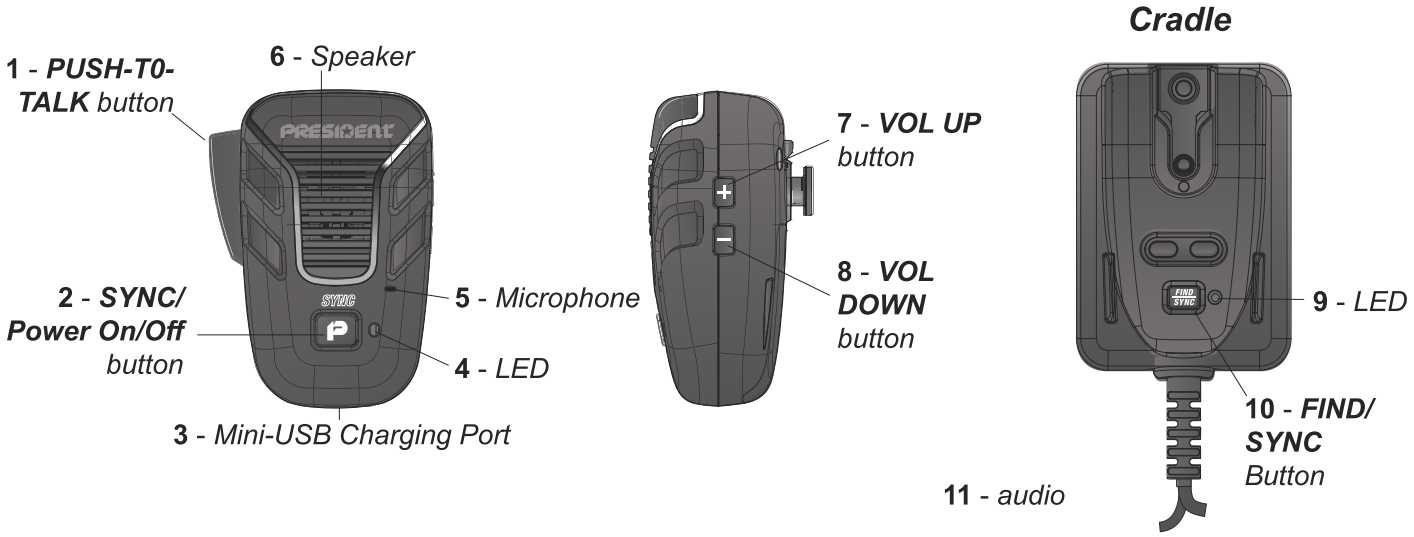

- Speaker and Microphone in a single unit
- Secure Sync
- Push-To-Talk Control Button
- Volume UP/Down Controls
- Auto power-off
- Three-color LED control
- Find button
- Up to 100 meter range
- Belt clip
- Car charger plug with mini-USB connection

1342/03-13 C0293b

Specifications

Speaker Output	: 8 ohm
Operating Temp.	: - 10º C ~ 50º C
Storage Temp.	: - 20º C ~ 60º C
Ni-MH battery	: BT-914
Typical Battery Life	: 8 hours
DC Charger Power Input	: 12 ~ 24 V DC
Digital Format	: DECT
Frequency Band	: 1880 ~ 1900 MHz

LED (4) Definitions

Color	Status	Meaning
Green	Solid On	Linked, battery charged
Red	Solid On	Linked, low battery
All	Off	Powered down
Green	Long Flash	Transmitting, battery charged
Red	Long Flash	Transmitting, low battery
Green	Short Stutter	Registration mode, battery charged
Red	Short Stutter	Registration mode, low battery
Orange/Green	Short Flash	Not linked, battery charged
Orange/Red	Short Flash	Not linked, low battery
Green/Red	Long Flash	Charging, battery not full
All	Long Flash	Unregistered